



GULLY COVER SLAB



KERB DETAIL

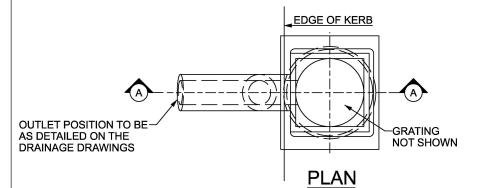

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETRES.
- 2. THE MINIMUM DEPTH FROM THE TOP OF THE GRATING TO THE TOP OF THE GULLY OUTLET IS TO BE 750mm WHEN THE CONNECTING PIPE IS UNDER A CARRIAGEWAY, HARD SHOULDER OR HARD STRIP AND 600mm ELSEWHERE.
- 3. PRECAST CONCRETE GULLIES AND COVER SLABS SHALL BE TO IS EN 1917 OR BS 5911-6.
- 4. FOR DETAILS OF TYPICAL GULLY GRATING SEE CC-SCD-00512.
- 5. WHERE A GULLY HAS A TRAP THE STOPPERS SHALL COMPLY WITH THE REQUIREMENTS OF BS 5911-4 AND IS EN 1917.
- 6. FOR DETAILS OF GULLY GRATINGS REFER TO APPENDIX 5/1.
- SEE CC-SCD-00511 FOR IN-SITU CONCRETE AND BLOCKWORK GULLIES.



NOT TO SCALE

CC Construction & Commissioning

STANDARD CONSTRUCTION DETAILS (SCD)

PUBLICATION TITLE

DRAINAGE

PRECAST CONCRETE GULLY

HISTORICAL REFERENCE DOCUMENTATION SET

RCD/500/10 STANDARDS

PUBLICATION DATE

SEPTEMBER 2024

CC SCD

PUBLICATION NUMBER

00510